

Bluetooth T8 Tube Light

BLE-LT5



FEATURES

Bluetooth Remote

* Utilize Bluetooth Mesh 5.0 technology

Reduce Energy Consumption

* Energy saving up to 50% compared to fluorescent lamps

Easy to Install

* Replace T8 fluorescent tube directly and install easily

Longer Lifetime

* Utilize top brand LED chips for longer life and superior output maintenance.

* Reduce replacements and maintenance costs.

Special Optical Design

* Uniform light without glare and flicker

Suitable for Low Temperature Environment

* It can maintain normal operation at -25°C



SPECIFICATION

Model	Power	Luminous Flux	Color Temp.	CRI	Beam Angle	Input Voltage	Input Current	Luminous Efficiency	Lifetime	Weight	Wattage Equivalent (fluorescent lamp)
LT520A LT520B LT520C LT520D	10W	1150 lm 1150 lm 1120 lm 1000 lm	6500K 5000K 4000K 3000K	>80	120°	100-240V	0.04-0.1A	115 lm/w 115 lm/w 112 lm/w 100 lm/w	50,000 hrs	212 g	20W
LT522A LT522B LT522C LT522D	12W	1350 lm 1350 lm 1300 lm 1200 lm	6500K 5000K 4000K 3000K	>80	120°	100-240V	0.04-0.11A	115 lm/w 115 lm/w 112 lm/w 100 lm/w	50,000 hrs	212 g	20W
LT540A LT540B LT540C LT540D	20W	2300 lm 2300 lm 2240 lm 2000 lm	6500K 5000K 4000K 3000K	>80	120°	100-240V	0.08-0.2A	115 lm/w 115 lm/w 112 lm/w 100 lm/w	50,000 hrs	395 g	40W
LT448A LT448B LT448C LT448D	28W	3200 lm 3200 lm 3040 lm 2700 lm	6500K 5000K 4000K 3000K	>80	120°	100-240V	0.11-0.3A	115 lm/w 115 lm/w 112 lm/w 100 lm/w	50,000 hrs	470 g	100W
LT5A0A LT5A0B LT5A0C LT5A0D	33W	3800 lm 3894 lm 3700 lm 3300 lm	6500K 5000K 4000K 3000K	>80	120°	100-240V	0.11-0.3A	115 lm/w 118 lm/w 112 lm/w 100 lm/w	50,000 hrs	480 g	100W
LT5A1A LT5A1B LT5A1C LT5A1D	37W	4400 lm 4400 lm 4200 lm 3700 lm	6500K 5000K 4000K 3000K	>80	120°	100-240V	0.16-0.41A	115 lm/w 115 lm/w 112 lm/w 100 lm/w	50,000 hrs	710 g	110W

* Data based on available wattages and LED solutions.




Application

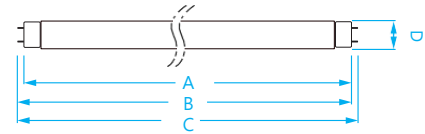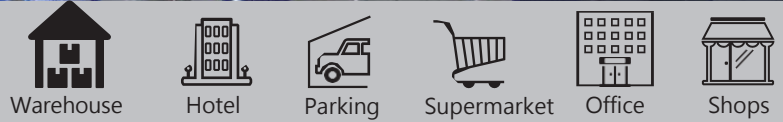

mm

Power	A Max.	B Max.	C Max.	D Max.
10 W	589.8	596.9	604.0	29.3
12 W	894.6	901.7	908.8	29.3
20 W	1199.4	1206.5	1213.6	29.3
28 W	1199.0	1206.5	1213.6	29.3
33 W	1499.0	1506.1	1513.0	29.3
37 W	2367.0	2374.1	2381.0	29.3

Installation Method



Lampholder